



Precourt Aluminum Round Thimbles:


Sometime called Low friction rings, lash Bobins or static blocks these age-old solutions are highly effective in semi staitic appli-cations.

They are made out of 6061-T6 aluminum and deep anodized.

- Cost effective
- High load vs weight ratio
- Multiple applications
- When used with Dyneema line, the friction is minimal

Some applications:

- Backstay cascades
- Backstay flickers
- Kicker cascades
- Jib clew control lines
- Jib barber haulers
- Inner forestay cascade
- Boom Vang
- Lazy Jacks
- Fairleads

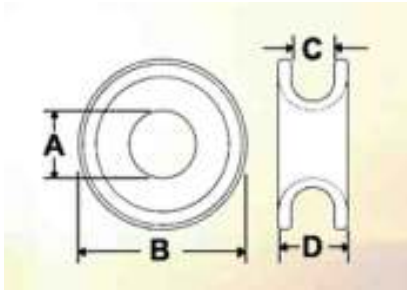

	A	B	C	D	WL	BL	weight
RT1	10mm	25.5mm	6mm	10mm	0.45T*	0.85T	4 g
RT2	12mm	32mm	8mm	12mm	0.9T*	1.7T	10 g
RT3	19mm	45mm	12mm	19mm	2.5T*	4.5T	25 g
RT4	32mm	61mm	16mm	24mm	4.0T*	7.5T	66 g

* Even with the stated working load since the system will still be operational even if the thimble start to deform.